

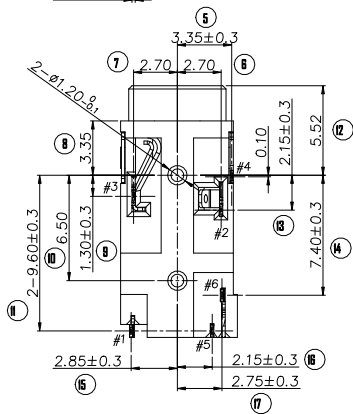


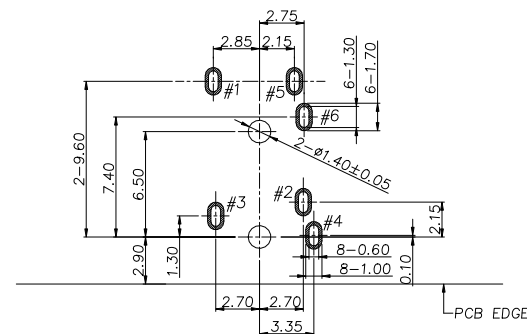




Level-1 Controlled Substances are banned



SPECIFICATION **

- Electrical characteristics
 - Voltage rating: DC 30V.
 - Current rating: 0.5A
 - Contact resistance: 30mΩ Max.(Initial)
After test: 50mΩ Max.
 - Insulation resistance: 100MΩ Min(500V DC).
 - Withstanding voltage: 500V AC.
- Mechanical characteristics
 - Life test: 5000 cycles
 - Mating force: 3-30N
Unmating force: 3-30N
- Salt Spray: Gold nickel Area 24 hours, Matte Tin Area 8 hours
- Wave Solder 265°C, 3-5 sec.
IR Reflow, Peak Temp 230-250°C, 20-90 sec.
- Mark "X" is Key Control Size.

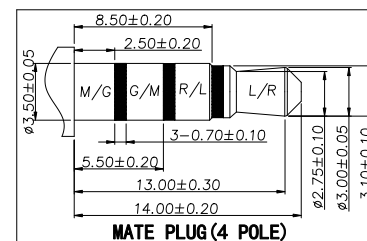

①	Housing	1	PA10T	—	Black, UL 94V-0
②	CONTACT 6 #6	1	BRONZE	—	Gold Flash Plating At Contact Area; Gold Flash Plating At Solder Tail Area; Nickel 50u"Under Plating All Over
③	CONTACT 5 #5	1	BRONZE Insert Molding(PA10T)	—	—
④	CONTACT 4 #4	1	BRONZE	—	Gold 30u"/Gold Flash Plating At Contact Area;
⑤	CONTACT 3 #3	1	BRONZE	—	Matte-TIN Plating At Solder Tail Area;
⑥	CONTACT 2 #2	1	BRONZE	—	Nickel 50u"Under Plating All Over
⑦	CONTACT 1 #1	1	BRONZE	—	—
NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK

GENERAL TOLERANCE
UNLESS OTHERWISE SPECIFIED



General	Angle
X ± 0.50	X ° ± 3°
X.X ± 0.30	X.X ° ± 2°
X.XX ± 0.20	X.XX ° ± 1°
X.XXX ± 0.10	

CUSTOMER COPY TITLE: PHONE JACK

PART NO. PJ-D3142E-1

PROJ: SCALE: 1:1 UNIT: mm SIZE: A4 SHEET: 1 OF 1

						DESIGN	Steven	19'/06/07	
						CHECK	Jason	19'/06/07	
						APPRO.	Max.hu	19'/06/07	
ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.				