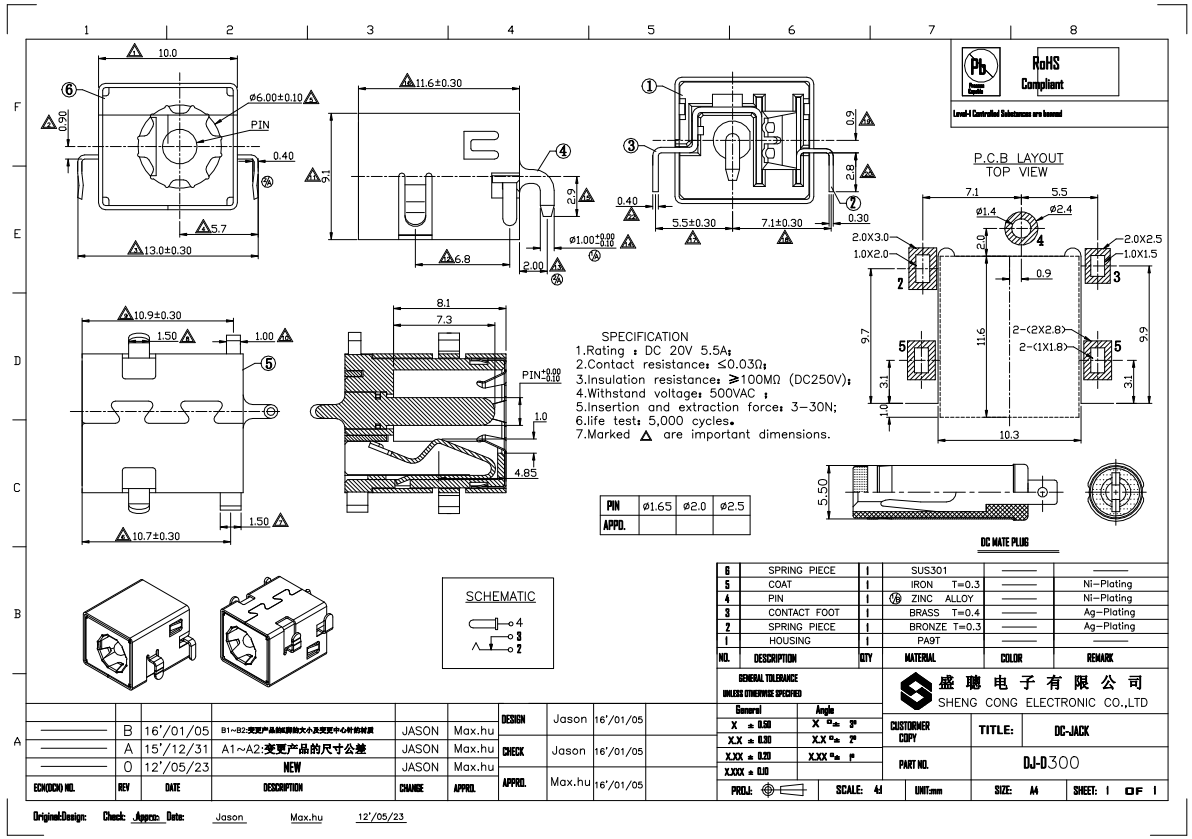
RoHS Compliant
Level-I Controlled Substances are banned
P.C.B LAYOUT
TOP VIEW
SPECIFICATION
1.Rating : DC 20V 5.5A;
2.Contact resistance: ≤0.03Ω;
3.Insulation resistance: ≥100MΩ (DC250V);
4.Withstand voltage: 500VAC ;
5.Insertion and extraction force: 3-30N;
6.life test: 5,000 cycles.
7.Marked △ are important dimensions.
DC MATE PLUG
SCHEMATIC
PIN ø1.65 ø2.0 ø2.5
APPD.
6 SPRING PIECE 1 SUS301
5 COAT 1 IRON T=0.3 Ni-Plating
4 PIN 1 ZINC ALLOY Ni-Plating
3 CONTACT FOOT 1 BRASS T=0.4 Ag-Plating
2 SPRING PIECE 1 BRONZE T=0.3 Ag-Plating
1 HOUSING 1 PA9T
NO. DESCRIPTION QTY MATERIAL COLOR REMARK
GENERAL TOLERANCE
UNLESS OTHERWISE SPECIFIED
盛聰电子有限公司
SHENG CONG ELECTRONIC CO.,LTD
CUSTOMER COPY
TITLE: DC-JACK
PART NO. DJ-0300
B 16'/01/05 B1~B2:变更产品结构图和大小及变更中心针的材质 JASON Max.hu
A 15'/12/31 A1~A2:变更产品的尺寸公差 JASON Max.hu
0 12'/05/23 NEW JASON Max.hu
ECN(DCN) NO. REV DATE DESCRIPTION CHANGE APPRD.
DESIGN Jason 16'/01/05
CHECK Jason 16'/01/05
APPRD. Max.hu 16'/01/05
PROJ: SCALE: 4:1 UNIT:mm SIZE: A4 SHEET: 1 OF 1
Original:Design: Check: Approv: Date: Jason Max.hu 12'/05/23

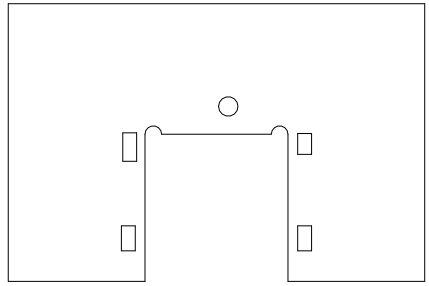

普通

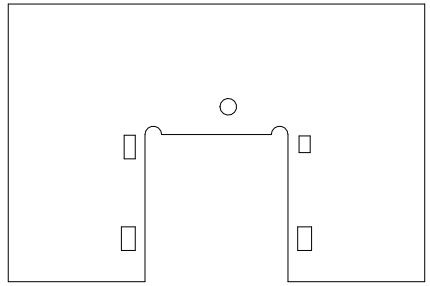

加严的