


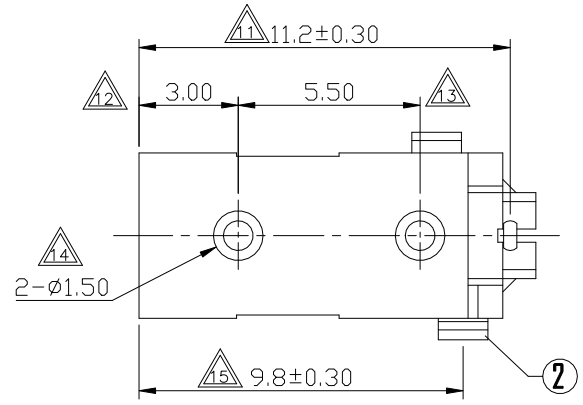
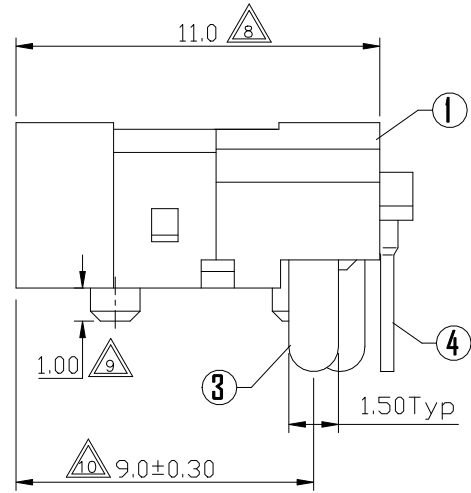


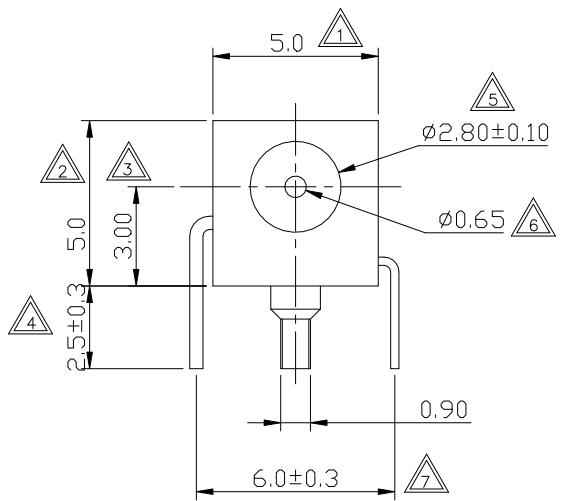

Level-I Controlled Substances are banned



P. C. B LAYOUT
TOP VIEW

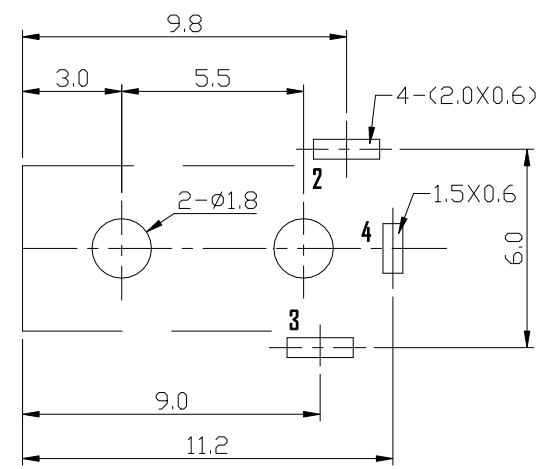

SPECIFICATION
 1. Rating : DC 30V 1.0A;
 2. Contact resistance: ≤0.05Ω;
 3. Insulation resistance: ≥100MΩ (DC250V);
 4. Withstand voltage: 500VAC ;
 5. Insertion and extraction force: 3-30N;
 6. Life test: 5,000 cycles.
 7. Marked are important dimensions.

NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK
4	PIN	1	BRASS	—	Ag-Plating
3	SPRING	1	SUS301	—	Ag-Plating
2	FLAT FOOT	1	BRASS	—	Ag-Plating
1	HOUSING	1	PA66	—	—



GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED		CUSTOMER COPY	TITLE: DC-JACK
General	Angle		
X ± 0.50	X ° ± 3°	PART NO.	DJ-DO 11
X.X ± 0.30	X.X ° ± 2°		
X.XX ± 0.20	X.XX ° ± 1°		
X.XXX ± 0.10		UNIT:mm	SIZE: A4
PROJ:	SCALE: 1:1		SHEET: 1 OF 1

ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	DESIGN	DATE
	0	12'/06/05	NEW		Steven	Max.hu	12'/06/05
					Jason	Max.hu	12'/06/05
					Max.hu	Max.hu	12'/06/05