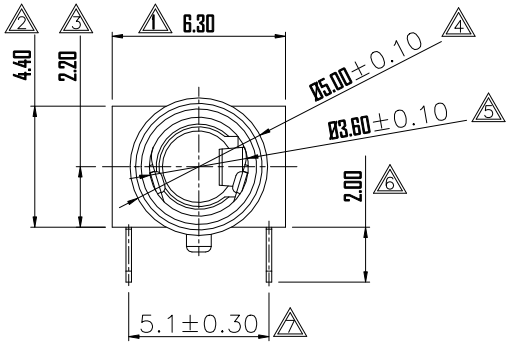

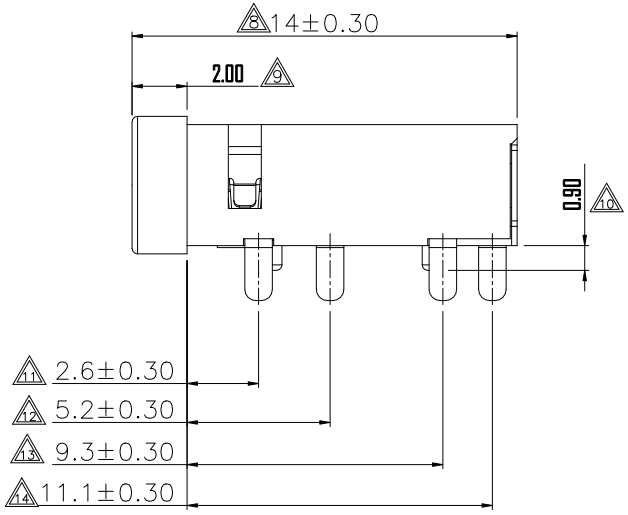

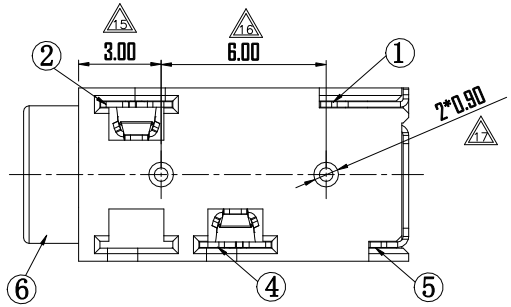

SPECIFICATION

1.Rating ： DC 30V 0.5A;
2.Contact resistance: ≤0.03Ω;
3.Insulation resistance: ≥100MΩ (DC250V);
4.Withstand voltage: 500VAC ;
5.Insertion and extraction force: 3—30N;
6.life test: 5,000 cycles。
7.Marked △ are important dimensions.

线路板开孔尺寸
P.C.B LAYOUT

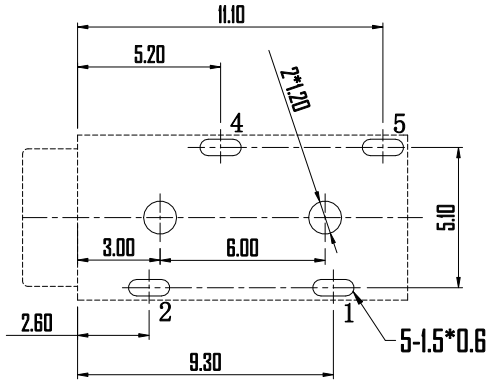

按点示意图
SCHEMATIC



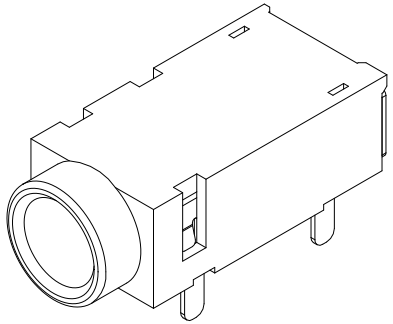

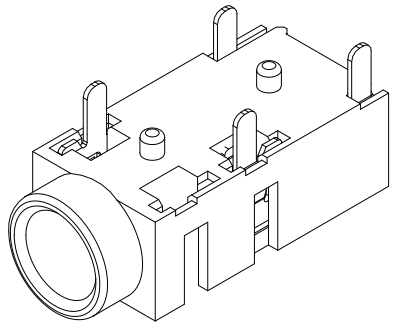

NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK
6	HOUSING	1	PBT	———	———
5	CONTACT FOOT	1	BRONZE	———	Au—Plating
4	CONTACT FOOT	1	BRONZE	———	Au—Plating
3					
2	CONTACT FOOT	1	BRONZE	———	Au—Plating
1	CONTACT FOOT	1	BRONZE	———	Au—Plating

ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.
———	0	12'/07/09	NEW	JASON	Max.hu

DESIGN	Jason	12'/07/09
CHECK	Jason	12'/07/09
APPRO.	Max.hu	12'/07/09

GENERAL TOLERANCE
UNLESS OTHERWISE SPECIFIED

General	Angle
X ± 0.50	X °± 3°
X.X ± 0.30	X.X °± 2°
X.XX ± 0.20	X.XX °± 1°
X.XXX ± 0.10	

RoHS Compliant
Process Capable
Level-I Controlled Substances are banned

盛 聰 电 子 有 限 公 司
SHENG CONG ELECTRONIC CO.,LTD

CUSTORMER COPY

TITLE: PHONE JACK

PART NO. PJ-D3127—1

PROJ: SCALE: 4:1 UNIT:mm SIZE: A4 SHEET: 1 OF 1

Original:Design: Jason Check: Approv: Max.hu Date: 12'/07/09