



Level-I Controlled Substances are banned

P.C.B LAYOUT  
TOP VIEW

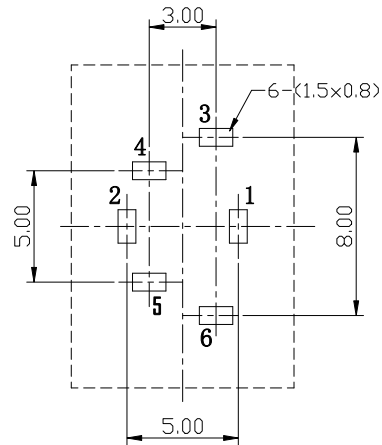

**SPECIFICATION**  
 1.Rating : DC 30V 0.5A;  
 2.Contact resistance:  $\leq 0.03\Omega$ ;  
 3.Insulation resistance:  $\geq 100M\Omega$  (DC250V);  
 4.Withstand voltage: 500VAC ;  
 5.Insertion and extraction force: 3-30N;  
 6.life test: 5,000 cycles.  
 7.Marked  $\triangle$  are important dimensions.

**SCHMATIC**



9	COAT	1	SUS301	—	—
8	COVER	1	PBT	—	—
7	HOUSING	1	PBT	—	—
6	6# CONTACT FOOT	1	BRONZE	—	Ag-Plating
5	5# CONTACT FOOT	1	BRONZE	—	Ag-Plating
4	4# CONTACT FOOT	1	BRASS	—	Ag-Plating
3	3# CONTACT FOOT	1	BRONZE	—	Ag-Plating
2	2# CONTACT FOOT	1	BRONZE	—	Ag-Plating
1	1# CONTACT FOOT	1	BRONZE	—	Ag-Plating

NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK
GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED					
General		Angle			
X $\pm 0.50$		X $\square \pm 3^\circ$			
X.X $\pm 0.30$		X.X $\square \pm 2^\circ$			
X.XX $\pm 0.20$		X.XX $\square \pm 1^\circ$			
X.XXX $\pm 0.10$					
PROJ:			SCALE: 4:1	UNIT:mm	



CUSTOMER COPY	TITLE: PHONE JACK
PART NO.	PJ-D3109
SIZE: A4	SHEET: 1 OF 1

						DESIGN	Jason	12'/05/07	
						CHECK	Jason	12'/05/07	
	0	12'/05/07	NEW	JASON	Max.hu	APPRO.	Max.hu	12'/05/07	
ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.				