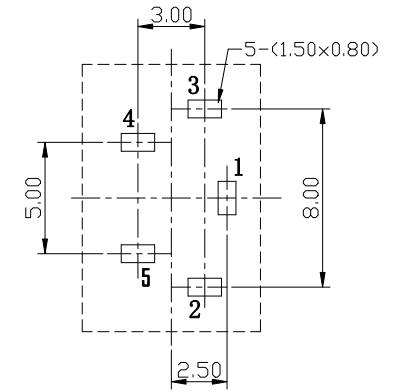
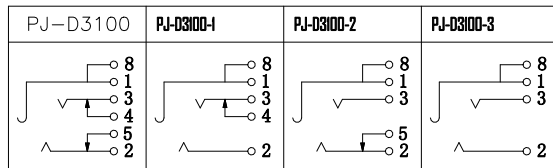

**RoHS Compliant**  
 Level-I Controlled Substances are banned

P.C.B LAYOUT  
TOP VIEW



**SPECIFICATION**  
 1. Rating : DC 30V 0.5A;  
 2. Contact resistance:  $\leq 0.03\Omega$ ;  
 3. Insulation resistance:  $\geq 100M\Omega$  (DC250V);  
 4. Withstand voltage: 500VAC ;  
 5. Insertion and extraction force: 3-30N;  
 6. life test: 5,000 cycles.  
 7. Marked  $\triangle$  are important dimensions.

**SCHEMATIC**



8	COAT	1	SUS301	—	—
7	COVER	1	PA66	—	—
6	HOUSING	1	PBT	—	—
5	5# CONTACT FOOT	1	BRASS	—	Ag-Plating
4	4# CONTACT FOOT	1	BRASS	—	Ag-Plating
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE	—	Ag-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	—	Ag-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	—	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK

<b>GENERAL TOLERANCE</b> UNLESS OTHERWISE SPECIFIED		 <b>盛聰电子有限公司</b> SHENG CONG ELECTRONIC CO.,LTD	
General	Angle		
X ± 0.50	X ° ± 3°	CUSTOMER COPY	TITLE: PHONE JACK
X.X ± 0.30	X.X ° ± 2°		
X.XX ± 0.20	X.XX ° ± 1°	PART NO.	PJ-D3100
X.XXX ± 0.10			
PROJ:	SCALE: 4:1	UNIT:mm	SHEET: 1 OF 1

					DESIGN	Jason	12'/05/07
					CHECK	Jason	12'/05/07
	0	12'/05/07	NEW	JASON	Max.hu		
ECN(OCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.		
					APPRO.	Max.hu	12'/05/07