


RoHS Compliant

 Level-1 Controlled Substances are banned


P.C.B LAYOUT
TOP VIEW

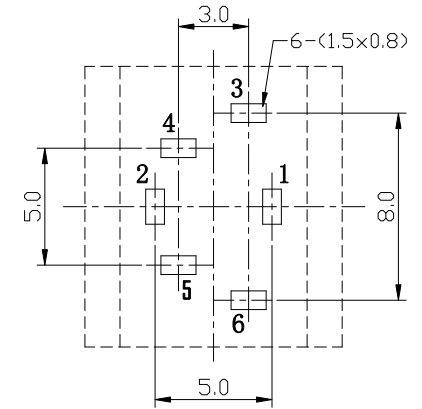

SPECIFICATION

- Rating : DC 30V 0.5A;
- Contact resistance: $\leq 0.03\Omega$;
- Insulation resistance: $\geq 100M\Omega$ (DC250V);
- Withstand voltage: 500VAC ;
- Insertion and extraction force: 3-30N;
- life test: 5,000 cycles.
- Marked \triangle are important dimensions.

SCHMATIC



NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK
9	COAT	1	SUS301	—	—
8	COVER	1	PBT	—	—
7	HOUSING	1	PBT	—	—
6	6# CONTACT FOOT	1	PHOSPHOR BRONZE	—	Ag-Plating
5	5# CONTACT FOOT	1	PHOSPHOR BRONZE	—	Ag-Plating
4	4# CONTACT FOOT	1	BRASS	—	Ag-Plating
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE	—	Ag-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	—	Ag-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	—	Ag-Plating

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED		MATERIAL		COLOR	REMARK	
General	Angle	 盛聰电子有限公司 SHENG CONG ELECTRONIC CO.,LTD		CUSTORMER COPY	TITLE:	
X ± 0.50	X °± 3°				PHONE JACK	
X.X ± 0.30	X.X °± 2°				PART NO.	PJ-D3098B
X.XX ± 0.20	X.XX °± 1°					
X.XXX ± 0.10		SCALE: 4:1	UNIT:mm	SIZE: A4	SHEET: 1 OF 1	

ECN(OCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.
	0	12'/05/07	NEW	JASON	Max.hu