






F
E
D
C
B
A



SECTION B-B

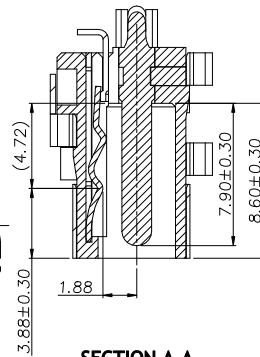

SECTION A-A




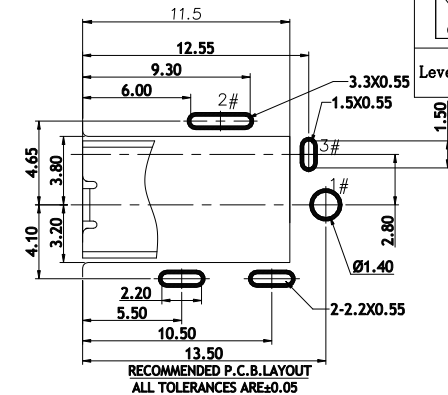


RECOMMENDED P.C.B. LAYOUT
ALL TOLERANCES ARE±0.05




RoHS
Compliant

Level1-1 Controlled Substances are banned

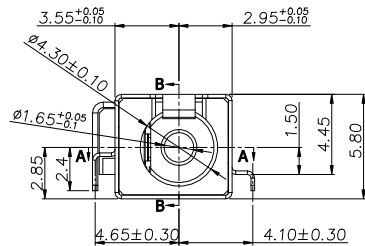

SCHEMATIC

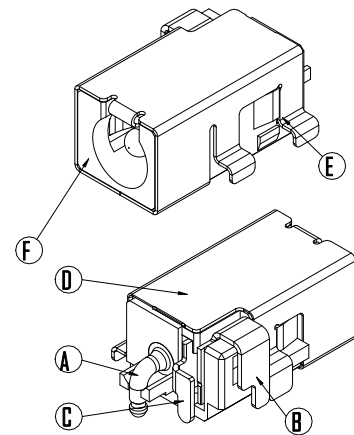

SPECIFICATION

- 1.Rating : DC 12V 3A;
- 2.Contact resistance : ≤0.03Ω;
- 3.Insulation resistance : ≥100MΩ (DC250V);
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 5-30N;
- 6.life test : 5,000 cycles.
- 7.PLUG 插入后上下左右4个方向无瞬断现象

Ⓕ	Housing	1	High temp.thermoplastic	——	Black,UL 94V-0
Ⓖ	Stopper	1	High temp.thermoplastic	——	Black,UL 94V-0
Ⓓ	Shell	1	BRONZE	——	Nickel 50u" Plating
Ⓒ	Shunt terminal 3#	1	BRONZE	——	Gold flash Plating All Area;
Ⓗ	Spring (-) 2#	1	BRONZE	——	Nickel 50u" Under Plating All Over
Ⓐ	PIN (+) 1#	1	BRASS	——	
NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK

GENERAL TOLERANCE
UNLESS OTHERWISE SPECIFIED

General	Angle
X ± 0.50	X ° ± 3°
X.X ± 0.30	X.X ° ± 2°
X.XX ± 0.20	X.XX ° ± 1°
X.XXX ± 0.10	



盛聰电子有限公司
SHENG CONG ELECTRONIC CO.,LTD

CUSTOMER
COPY

TITLE:

DC JACK

PART NO.

DJ-D063

PROJ:

SCALE: 1:1

UNIT:mm

SIZE: A4

SHEET: 1 OF 1

Original:Design: StevenCheck: JiaAppro: Data.hu 12'/06/07

						DESIGN	Steven	12'/06/07	
						CHECK	Jason	12'/06/07	
						APPRO.	Max.hu	12'/06/07	
ECN (DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.				

NEW Steven Max.hu