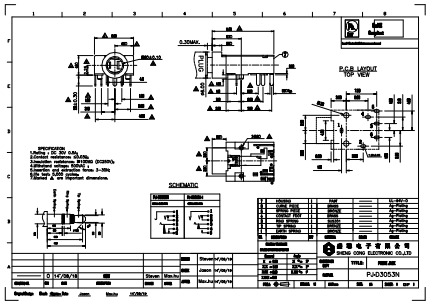
P.C.B. LAYOUT
TOP VIEW
SCHEMATIC
SPECIFICATION
Lifetime : DC 30V 0.5A.
Contact resistance : 50mΩ max.
Insulation resistance : 100MΩ (DC500V).
Dielectric strength : 500V a.c. 3~35Hz
Life test : 2,000 cycles.
Tolerance ± ±0.1(general dimension.
PJ-03053N

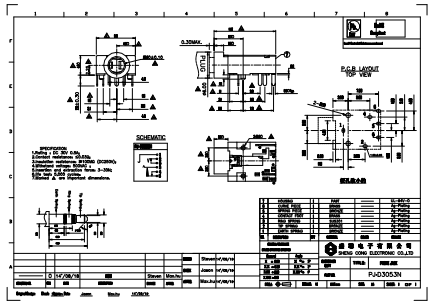
P.C.B. LAYOUT
TOP VIEW
SCHEMATIC
SPECIFICATION
Lifetime : DC 30V 0.5A.
Contact resistance : 50mΩ max.
Insulation resistance : 100MΩ (DC500V).
Dielectric strength : 500V a.c. 3~35Hz
Life test : 2,000 cycles.
Tolerance ± ±0.1(general dimension.
PJ-03053N