
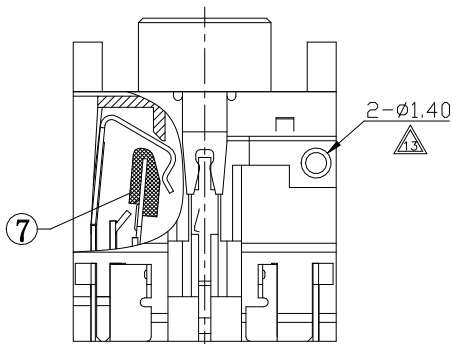
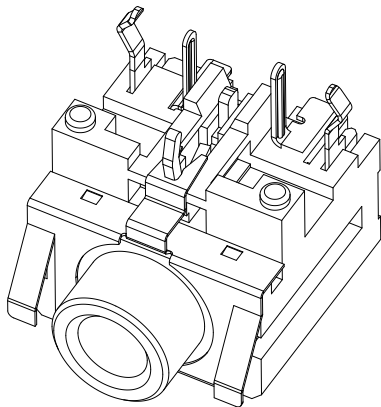
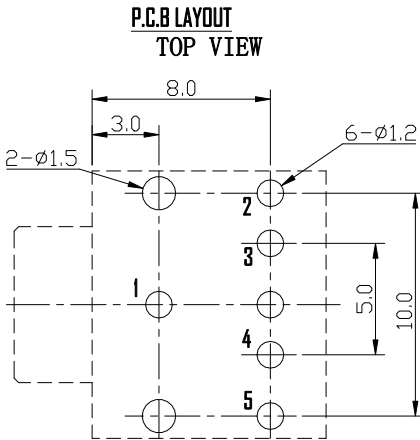
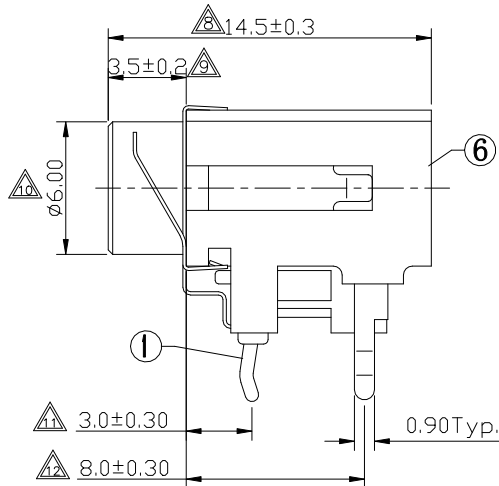
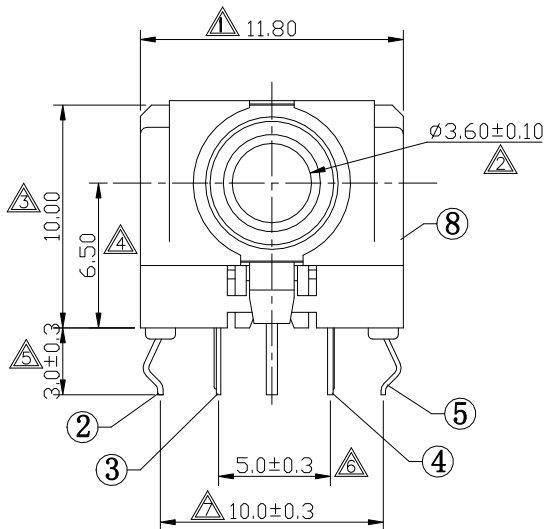



Level-I Controlled Substances are banned

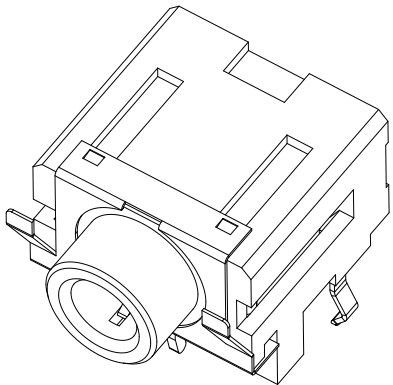

SPECIFICATION

- Rating : DC 30V 0.5A;
- Contact resistance: $\leq 0.03\Omega$;
- Insulation resistance: $\geq 100M\Omega$ (DC250V);
- Withstand voltage: 500VAC ;
- Insertion and extraction force: 3-30N;
- life test: 5,000 cycles.
- Marked $\triangle$ are important dimensions.

SCHEMATIC



8	SPRING SUPPORT	1	SUS301	—	—
7	INSULATOR	1	PBT	—	—
6	HOUSING	1	PBT	—	—
5	SPRING PIECE	1	BRONZE	—	Ag-Plating
4	CONTACT FOOT	1	SUS301	—	Ag-Plating
3	CONTACT FOOT	1	BRASS	—	Ag-Plating
2	SPRING PIECE	1	SUS301	—	Ag-Plating
1	CONTACT FOOT	1	BRASS	—	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK
GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED			 盛 聰 电 子 有 限 公 司 SHENG CONG ELECTRONIC CO.,LTD		
General		Angle			
X ± 0.50		X °± 3°			
X.X ± 0.30		X.X °± 2°			
X.XX ± 0.20		X.XX °± 1°			
X.XXX ± 0.10					
PROJ:			SCALE: 4:1	UNIT:mm	SHEET: 1 OF 1
CUSTOMER COPY			TITLE: PHONE JACK	PART NO. PJ-D3189S	

				DESIGN	Jason	12'/07/09	
				CHECK	Jason	12'/07/09	
	0	12'/07/09	NEW	APPRO.	Max.hu	12'/07/09	
ECN(OCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.		