
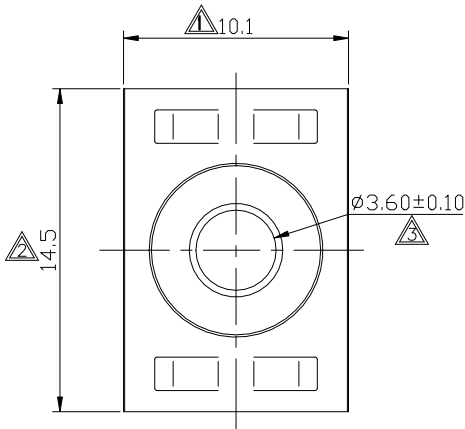


F
E
D
C
B
A





12 13 14 15 16 17 18

SCHEMATIC




SPECIFICATION

- 1.Rating : DC 30V 0.5A;
2.Contact resistance: ≤0.03Ω;
3.Insulation resistance: ≥100MΩ (DC250V);
4.Withstand voltage: 500VAC ;
5.Insertion and extraction force: 3-30N;
6.life test: 5,000 cycles.
7.Marked are important dimensions.

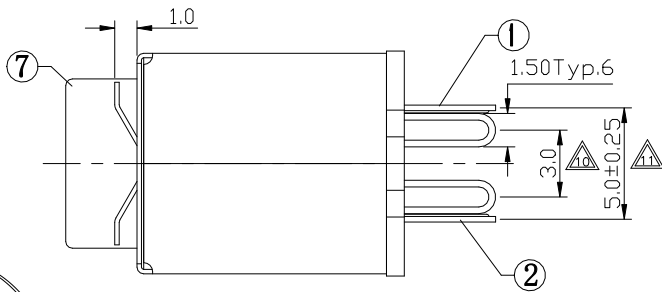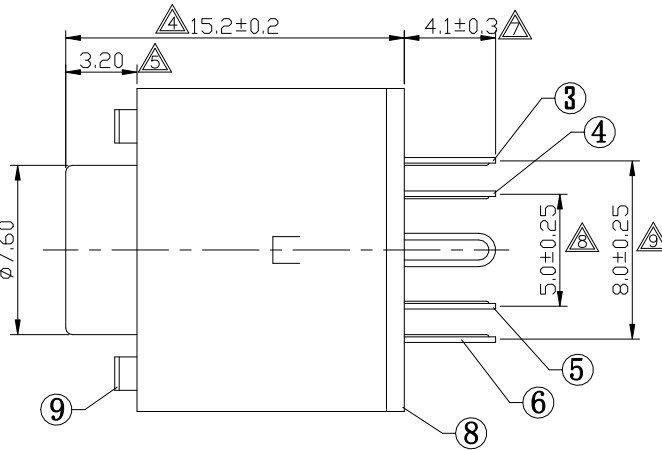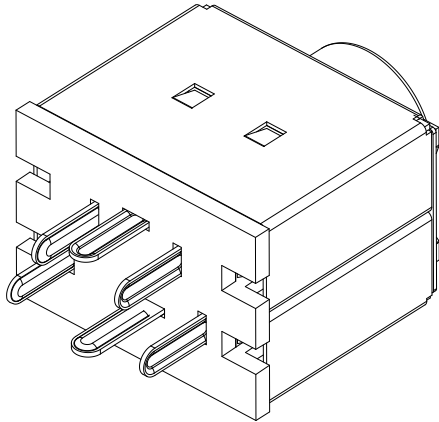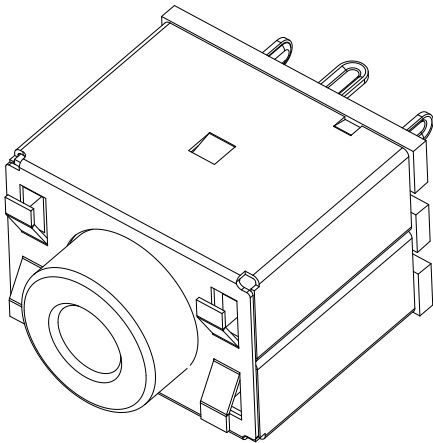

Level-I Controlled Substances are banned

P.C.B LAYOUT
TOP VIEW

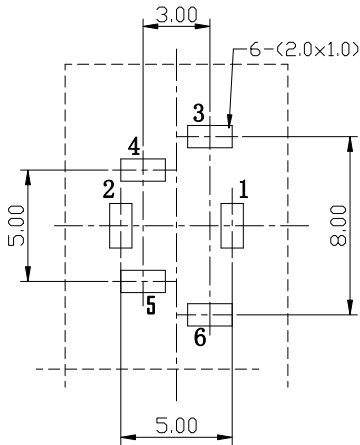

9	COAT	1	SUS301	—	—
8	COVER	1	PBT	—	—
7	HOUSING	1	PBT	—	—
6	6# CONTACT FOOT	1	BRONZE	—	Ag-Plating
5	5# CONTACT FOOT	1	BRONZE	—	Ag-Plating
4	4# CONTACT FOOT	1	BRASS	—	Ag-Plating
3	3# CONTACT FOOT	1	BRONZE	—	Ag-Plating
2	2# CONTACT FOOT	1	BRONZE	—	Ag-Plating
1	1# CONTACT FOOT	1	BRONZE	—	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED			 盛聰电子有限公司 SHENG CONG ELECTRONIC CO.,LTD		
General		Angle	CUSTOMER COPY	TITLE:	PHONE JACK
X ± 0.50	X °± 3°				
X.X ± 0.30	X.X °± 2°				
X.XX ± 0.20	X.XX °± 1°				
X.XXX ± 0.10		PART NO.	PJ-D3108		
PROJ: 			SCALE: 4:1	UNIT:mm	SIZE: A4