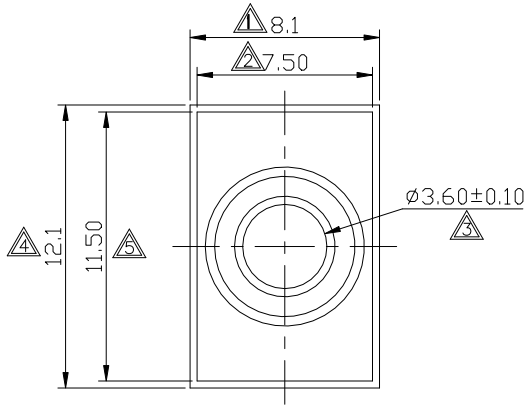

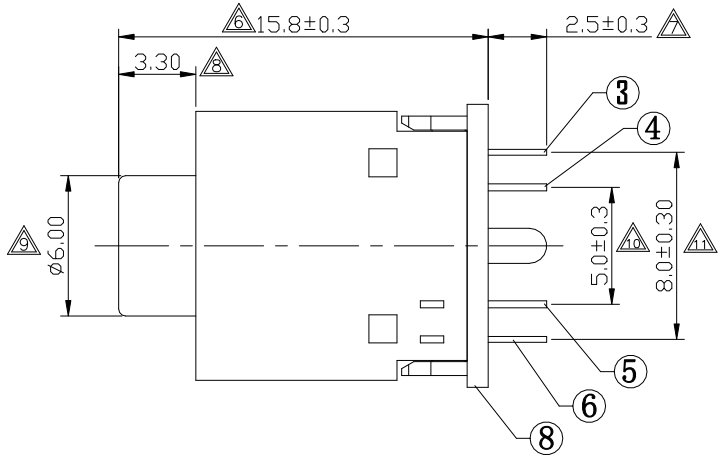

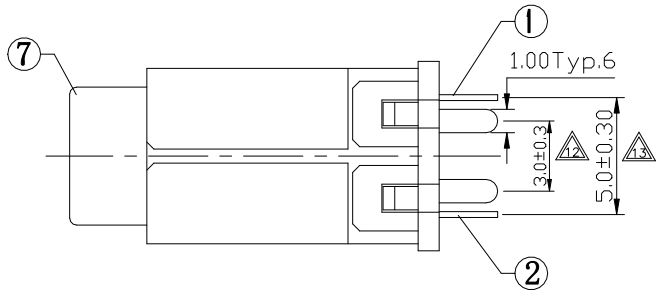

RoHS Compliant

Level-1 Controlled Substances are banned

P.C.B LAYOUT
TOP VIEW

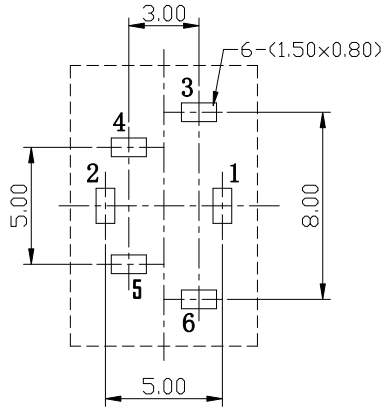

SPECIFICATION

1.Rating : DC 30V 0.5A;
2.Contact resistance: ≤0.03Ω;
3.Insulation resistance: ⩾100MΩ (DC250V);
4.Withstand voltage: 500VAC ;
5.Insertion and extraction force: 3—30N;
6.life test: 5,000 cycles.
7.Marked △ are important dimensions.

SCHEMATIC

PJ-D3097S	PJ-D3097S-1
	

NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK
8	COVER	1	PBT	———	———
7	HOUSING	1	PBT	———	———
6	6# CONTACT FOOT	1	PHOSPHOR BRONZE	———	Ag—Plating
5	5# CONTACT FOOT	1	PHOSPHOR BRONZE	———	Ag—Plating
4	4# CONTACT FOOT	1	BRASS	———	Ag—Plating
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE	———	Ag—Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	———	Ag—Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	———	Ag—Plating

ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.
———	0	12'/05/07	NEW	JASON	Max.hu

DESIGN	Jason	12'/05/07
CHECK	Jason	12'/05/07
APPRO.	Max.hu	12'/05/07

GENERAL TOLERANCE
UNLESS OTHERWISE SPECIFIED

General	Angle
X ± 0.50	X °± 3°
X.X ± 0.30	X.X °± 2°
X.XX ± 0.20	X.XX °± 1°
X.XXX ± 0.10	

盛聰电子有限公司
SHENG CONG ELECTRONIC CO.,LTD

CUSTORMER COPY	TITLE:	PHONE JACK	
PART NO.	PJ-D3097S		
PROJ:	SCALE: 4:1	UNIT:mm	SIZE: A4 SHEET: 1 OF 1

Original:Design: Jason Check: Appro: Max.hu Date: 12'/05/07