
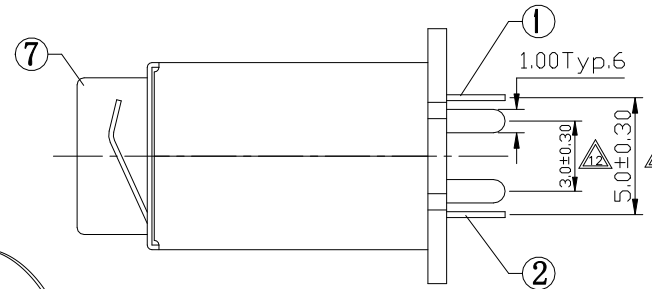
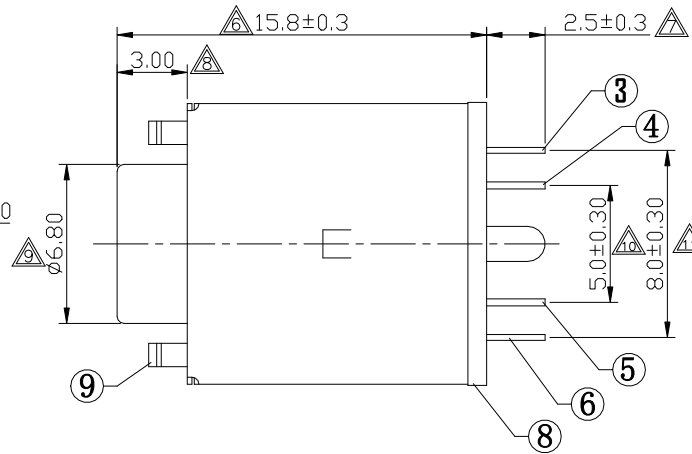
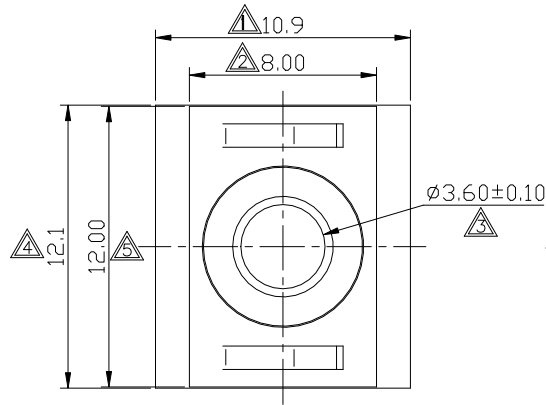



SCHEMATIC

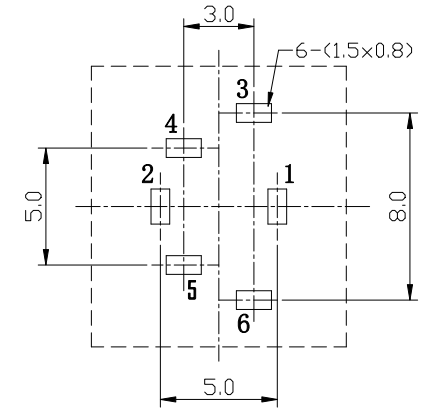


Level-I Controlled Substances are banned

P.C.B LAYOUT
TOP VIEW

SPECIFICATION

- 1.Rating : DC 30V 0.5A;
- 2.Contact resistance: $\leq 0.03\Omega$;
- 3.Insulation resistance: $\geq 100M\Omega$ (DC250V);
- 4.Withstand voltage: 500VAC ;
- 5.Insertion and extraction force: 3-30N;
- 6.life test: 5,000 cycles.
- 7.Marked $\triangle$ are important dimensions.

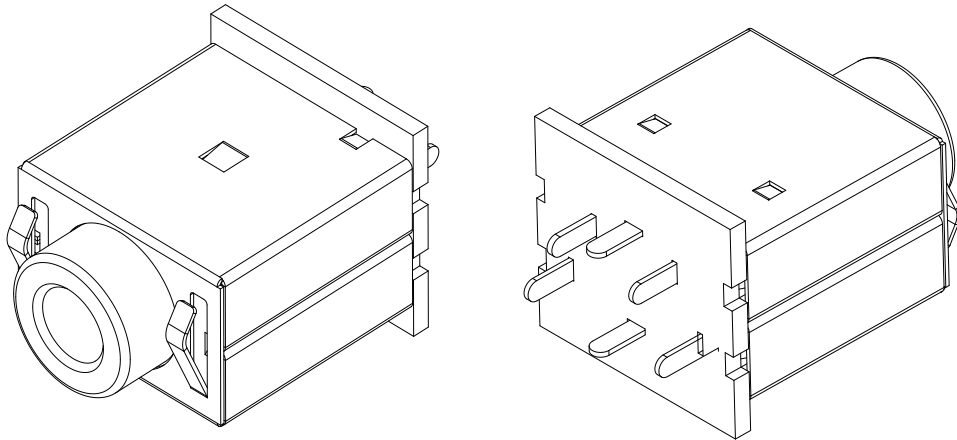

9	COAT	1	SUS301	—	—
8	COVER	1	PA9T	—	—
7	HOUSING	1	PA66	—	—
6	6# CONTACT FOOT	1	PHOSPHOR BRONZE	—	Ag-Plating
5	5# CONTACT FOOT	1	PHOSPHOR BRONZE	—	Ag-Plating
4	4# CONTACT FOOT	1	BRASS	—	Ag-Plating
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE	—	Ag-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	—	Ag-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	—	Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK

GENERAL TOLERANCE
UNLESS OTHERWISE SPECIFIED

General

X ± 0.50 X.X ± 0.30 X.XX ± 0.20 X.XXX ± 0.10

Angle

X $\square \pm 3^\circ$ X.X $\square \pm 2^\circ$ X.XX $\square \pm 1^\circ$ 盛聰电子有限公司
SHENG CONG ELECTRONIC CO.,LTDCUSTOMER
COPY

TITLE:

PHONE JACK

PART NO.

PJ-D3096B

PROJ: 

SCALE: 4:1

UNIT:mm

SIZE: A4

SHEET: 1 OF 1