

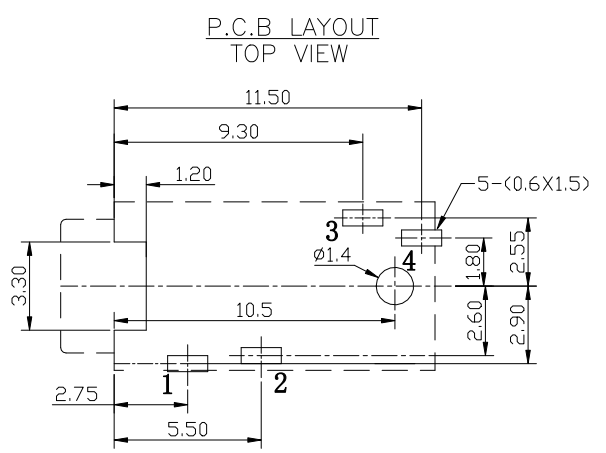
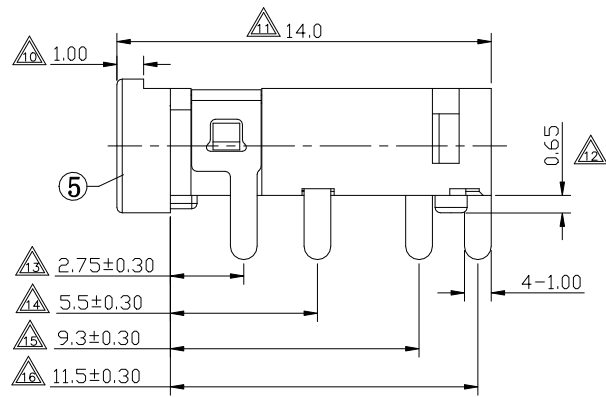
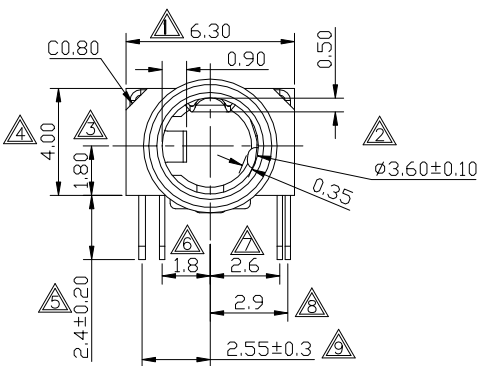
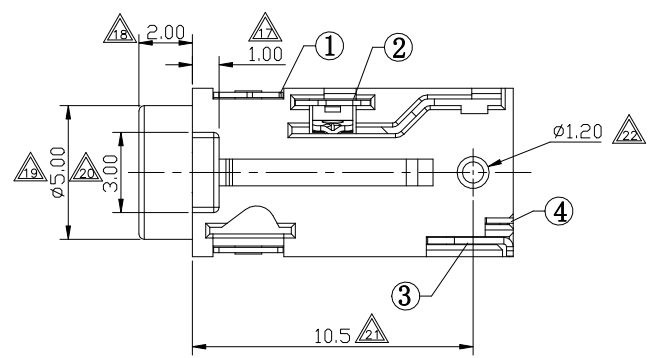


SPECIFICATION
1.Rating : DC 30V 0.5A;
2.Contact resistance: $\leq 0.05\Omega$;
3.Insulation resistance: $\geq 100M\Omega$ (DC250V);
4.Withstand voltage: 500VAC ;
5.Insertion and extraction force: 5-30N;
6.life test: 5,000 cycles.
7.Marked $\triangle$ are important dimensions.

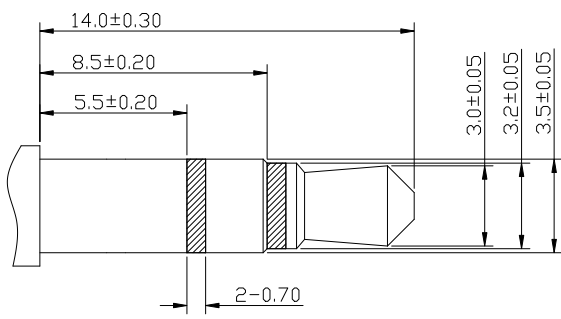

SCHEMATIC



Ø3.50mm 3 POLE PLUG

5	HOUSING	1	PA9T	—	—
4	4#CONTACT FOOT	1	BRONZE	—	Au-Plating
3	3#CONTACT FOOT	1	SUS301	—	Au-Plating
2	2#CONTACT FOOT	1	BRONZE	—	Au-Plating
1	1#CONTACT FOOT	1	BRONZE	—	Au-Plating
NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK
GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED			 盛聰电子有限公司 SHENG CONG ELECTRONIC CO.,LTD		
General		Angle			
X ± 0.50		X °± 3°			
X.X ± 0.30		X.X °± 2°			
X.XX ± 0.20		X.XX °± 1°			
X.XXX ± 0.10					
PROJ: 			SCALE: 1:1	UNIT:mm	REV: A4
			SHEET: 1 OF 1		

F
E
D
C
B
A

						DESIGN	Jason	17'/07/11	
						CHECK	Jason	17'/07/11	
						APPRO.	Max.hu	17'/07/11	
ECN(OCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.				